
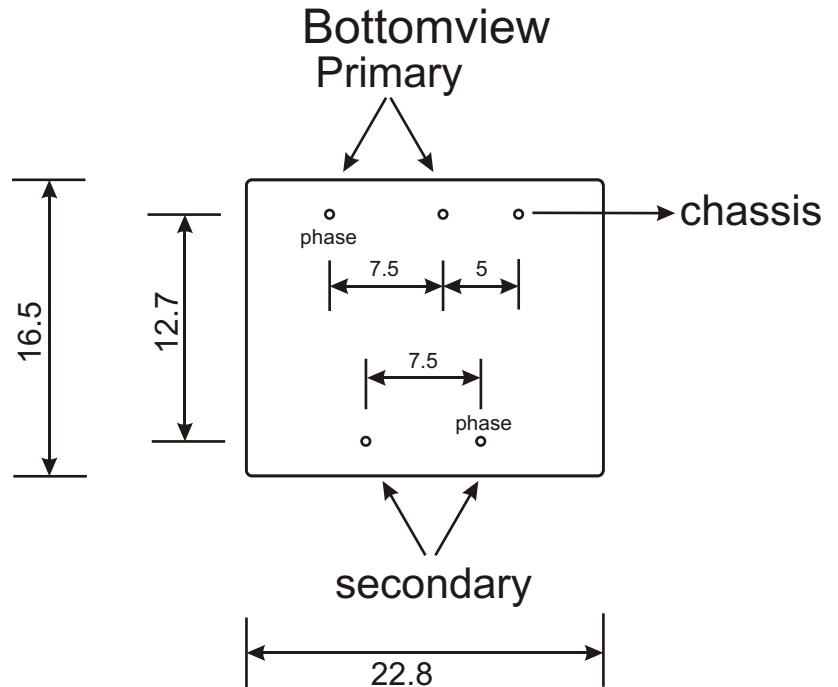
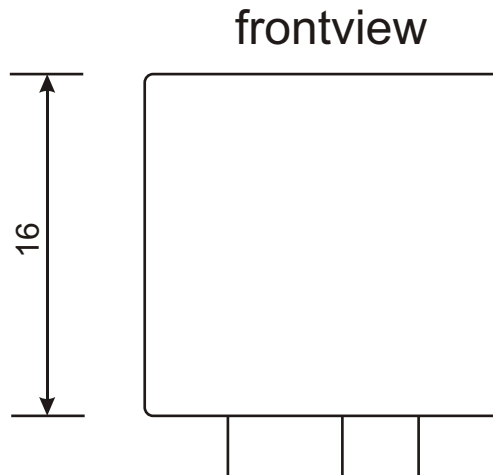


TM3P

Specifications:

ratio	1 : 15
frequency range $\pm 3\text{dB}$	30 - 25000Hz
max. input at 30Hz	800mV
to connect to primary	source of approx.600 ohm
to connect to secondary	min. 45kohm
max. voltage between primary and secondary	100V

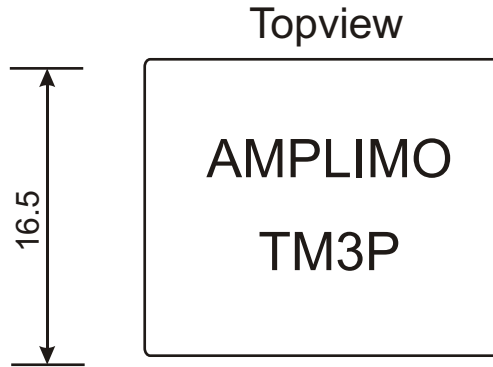

All dimensions are in mm



Vossenbrinkweg 1
NL-7491DA DELDEN
The Netherlands

P O - B o x 2 4
NL-7490AA DELDEN
The Netherlands
Tel.+31 (0)74 376 3765
Fax+31 (0)74 376 3132

info@amplimo.nl
http://www.amplimo.nl

HB

Nov-2004

© Copyright Amplimo BV

TM3P

Signal transformer
for pcb-mounting